

OEM-6000 platinum series








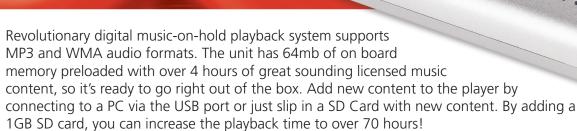



MP3 Digital On-Hold Audio System



- Ready to go right out of the box Pre-loaded with several files containing great sounding music mixed with intermittent "thanks for holding..." messages. Just plug it in and walk away. Anything else is completely optional.
- Auto start after power loss Retains stored preferences such as: music selection, repeat mode and volume settings. If power to the unit is lost, unit immediately returns to continuous playback with all settings without human intervention.
- **LCD Control Panel** 6 line backlit LCD panel displays ID-3 tags with descriptive names of tracks for easy identification and selection. Display also shows a variety of important information so user can choose playback preferences and easily determine unit's operational status.
- Flash memory 64MB of on-board flash memory stores over 4 hours (sampled at 32kbps) of awesome sounding content. Additional Secure Digital card (not included) can add over 70 hours of content for continuous playback (1GB SD card).







OEM-6000 platinum series

For Use With PBX & Key Phone Systems

Specifications

Player/Recorder

- On-board memory 64MB
- Maximum Memory Supported 1GB
- Supported audio standards MP3 and Microsoft Windows® Media (WMA) digital music
- Supported bit rates 32-320kbps
- External Memory Slot Secure Digital (SD) Memory Card
- Interface USB 1.1
- Playback modes repeat one, repeat all, repeat all shuffle
- Audio output mode mono (analog)
- ID-3 tag support
- Firmware upgradeable via USB or web connection
- LCD 6 line backlit display
- Built-in monitor speaker
- Interface devices USB port, RCA audio output, 2.5mm Power jack
- Minimum operating system (player USB connection) Windows - 98, 98 ME & SE, 2000, XP Mac - OS 9.0.4 or later, OS X 10.1 or later
- Warranty 3 year

■ Analog Audio Output

- 8 Ω- 4 volts peak to peak
- 600 Ω 8 volts peak to peak

Controls/Switches

- Play/pause
- Volume up/down
- Skip up/down
- Power on/off
- Repeat mode
- Monitor speaker on/off
- Impedance 8/600 Ω
- Power on/off

Power


- 12VDC @500mA
- Source -110VAC, 60Hz UL/CSA power pack

Physical

- Size: 9" x 7" x 2.25" (LWD)
- Weight: 3 lbs.
- Wall mountable

Includes

- Digital Player/Recorder
- USB Cable
- Audio Connector Cable
- AC Power Adapter

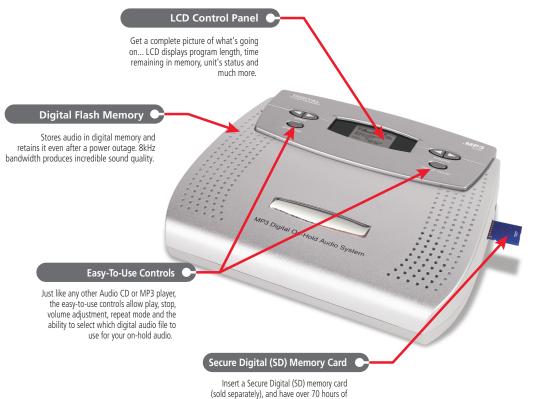



continuous on-hold audio.



